
CB 3: Simple, quick and economical.

A station really can be flexible, economical and fast. The CB 3 brings these three qualities together within one gantry car wash, leaving no requirement unfulfilled.





1 Attractive design

So that each operator can create their own look for their location, Kärcher offers a wide range of designs.

Perfect pre-cleaning

For removing insect residue and stubborn dirt.

3 Wheel wash

Optional wheel wash for impressive results.

4 Optimum contour capturing

The side brushes are either vertical or positioned at a 15° angle, the perfect position to capture the sills and the upper part of the vehicle.

5 Perfect drying


Perfect all-round drying thanks to two separate side driers and a contour-guided roof drier with pivoting vanes for optimal drying of the vehicle roof.

		CB 3 23/3	CB 3 25/3	CB 3 28/3
Technical data				
Washing height	mm	2,300	2,500	2,800
System height*	mm	3,215	3,415	3,715
System width**	mm	3,350	3,350	3,350
Fresh water connection	l / min / bar	50 / 4–6	50 / 4–6	50 / 4–6
Power input	kW	8	8	8
Power supply	~ / V / Hz	3 / 400 / 50	3 / 400 / 50	3 / 400 / 50
Number of brushes		3	3	3

*For stations with the "Eco" trim package without a front trim, the system height decreases by 65 mm.

** Exterior frame width, without side brush splash guard.

Innovations.

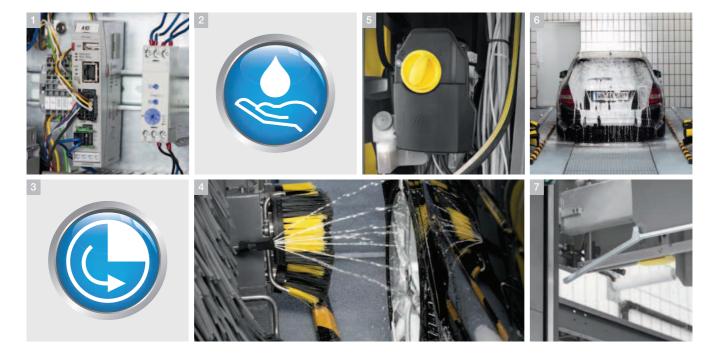

1 New control system

Thanks to the high quality Berghof control system, the CB 3 is already connected to the Kärcher fleet management system.

2 Water saving mode

Fresh water consumption is reduced by approximately 15 % per wash. This helps to protect natural resources and reduce costs for the operator.

3 Express wash

The quick wash programme enables a large number of vehicles to pass through the station: Two runs, once forwards, once backwards. Less waiting time and satisfied customers. This programme makes sure that the station works at maximum capacity.

4 Wheel foaming

By applying foam that the customer can see, they can be sure that they are getting their money's worth.

5 High pressure pump onboard

The powerful high pressure unit (1,300 l/h, 70 bar) is mounted to the station, requiring no additional space for technology.

6 Foam polish

Applying RM 837, the premium waxing programme takes less than 8 minutes and visibly protects and repairs the vehicle for up to 10 washes.

7 Opti Drop Stop

The Opti Drop Stop was developed by Kärcher to prevent water from dripping off the brushes onto the vehicle, guaranteeing a perfect drying experience.